P/N 146190



CONNECTOR HARNESS
(JKL PART NO.: BXA-12552/CONN

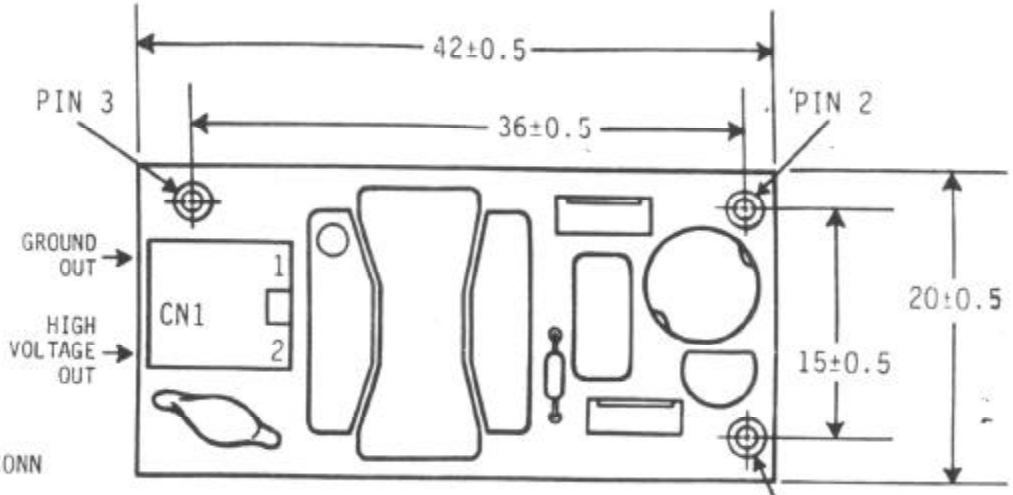

INVERTER
(JKL PART NO.: BXA-501/INV)

PIN 1

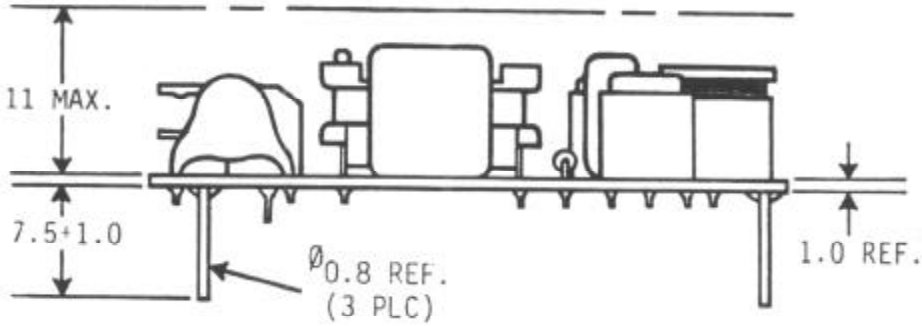

(PARTS LAYOUT FOR REFERENCE ONLY)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	4.5	5.0	5.5
INPUT CURRENT: (mA)	---	.200	.400
OUTPUT VOLTAGE: (Vrms)	600	700	800
OUTPUT CURRENT: (mA)	4.0	5.0	6.0
OUTPUT FREQUENCY: (kHz)	30	45	60
OPERATING TEMP: (CELSIUS)	0	25	50

CN1	PIN #	(TO LAMP)
	1	OUT GROUND
	2	N/C
	3	HIGH V

BOARD	PIN #	(INPUT)
	1	+V (Vin)
	2	V (GND)
	3	N/C

MECHANICAL DIMENSIONS ARE
IN MILLIMETERS.

FOR INVERTER AND CONNECTOR ORDER
JKL PART NO.: BXA-501/KIT.

TITLE	DRAWING NUMBER	REVISION
5V POWER SUPPLY	BXA-501/KIT	

JKL
COMPONENTS CORPORATION

RELEASE DATE	DRAWN BY	APPROVED BY
6/17/97	LEN	

SIZE	FSCM	SCALE	PAGE
A	55335	2X	1 OF 1